




TQX.13001 Triple QX Motor Oil 10W-40 SEMI SYNPLUS

Document version: 8 Sep 2026

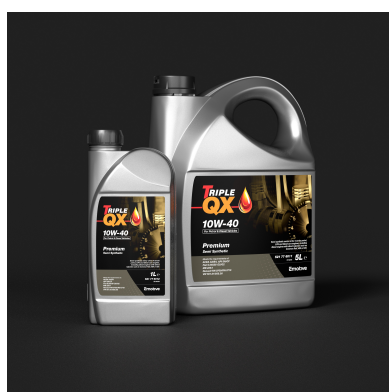

Description

TRIPLE QX PREMIUM 10W40 SEMI-SYNTHETIC è stato sviluppato appositamente per soddisfare i requisiti ACEA A3/B4. È progettato per la lubrificazione di autovetture a benzina, GPL e diesel a quattro tempi, compresi i motori diesel a iniezione diretta come Common Rail, HDI o CDI.

Application manual

Four-stroke gasoline-, LPG- and diesel engines, naturally aspirated and turbocharged. Recommended for Direct Injection diesel engines, Common Rail, HDI or CDI. Can be used all year round - thanks to its high and stable viscosity index.

According to the specifications of

ACEA A3/B4
API CF / SN
Fiat 9.55535-D2 / 9.55535-G2
MB 229.1
Renault RN 0700 / RN 0710
VW 501.01 / 505.00

Packaging units

ART. NR.	VOLUME	ITEMS PER UNIT	ITEMS PER PALLET
TQX.521776012	1 L	12	-
TQX.521776011	5 L	4	-
TQX.521776015	20 L	1	-
TQX.521776019	60 L	1	-
TQX.521770036	199 L	1	-

Standard analyses	TEST	VALUE		METHOD
	Density at 15°C	0.863	kg/l	ASTM D4052
	Kinematic Viscosity at 40°C	91.0	mm2/s	ASTM D445
	Kinematic Viscosity at 14.1°C	14.1	mm2/s	ASTM D445
	Viscosity Index	159		ASTM D2270
	Flashpoint COC	225	°C	ASTM D92
	Pourpoint	-39	°C	ASTM D6892
	Total Base Number	10.2	mgKOH/g	ASTM D2896

These characteristics are typical of current production. Variations in these characteristics may occur.